


The *Band* series constitutes a broad range of galvanised laminated steel products with a RAL colour chart painted finish, composed of a bench, a back accessory, a stool and three planters with different geometries and volumes. They can all be combined with the *Boxland* concrete collection. A connector element permits 45-degree aggregations. A table and bollard are included, which occasionally fulfils the function of a bicycle stand. The end result is a collection with simple lines that share the same support system and relationship with the paving.

Steel |  200 cm/max |  103 kg |  4

 Update 03.02.2022



Origin

The *Band* series was created with the intention of a quest for what is essential and abstract to give it permanence. It owes its name to the fact that it was designed as a musical band in which the instruments create a harmony with each other.

Design

Its design is formed by a strip of machined, folded and welded metal. The elementary nature of this series and its aggregation capacity allows it to blend in with its environment, giving rise to complex spatial relations. This property enables its use to be extended to historical areas where the textures and atmospheres generated by the superimposing of cultures and times do not accept the use of just any material or shape.

Material



All the components of the collection are made from 8 mm-thick machined, welded, galvanised sheet steel. With a RAL colour chart painted finish.

Installation

It can be installed resting on the paving and anchored with M-8 x 70 mm threaded bolts screwed into 12 mm openings previously created on the paving and filled with epoxy resin or fat mortar. The bollard is recessed in the paving by means of an 80-mm diameter metal tube welded at the base.



The fine line that outlines its density leaves a free space below the seats, which rest lightly and naturally on the paving.

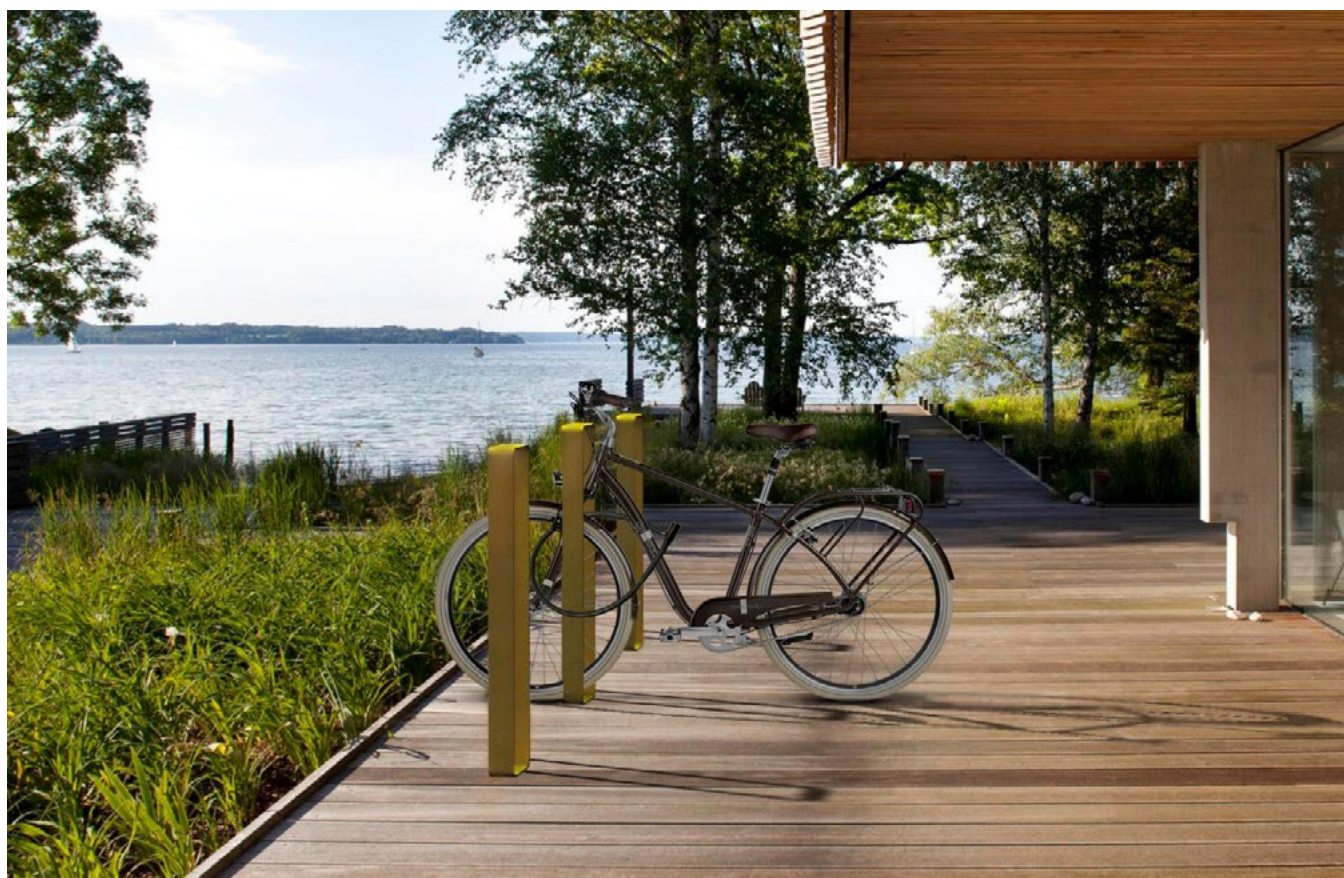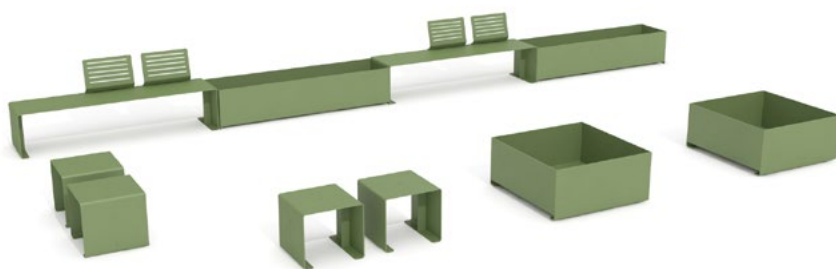

1. Backless bench, conector, stool and table

	Connector	Stool	Backless bench	Table
Dimensions	61 x 53 x 45 cm	50 x 50 x 45 cm	200 x 50 x 45 cm	150 x 65 x 75 cm

Weigh	45 kg	50 kg	102 kg	136 kg
--------------	-------	-------	--------	--------

1.1 General features


Material	Zinc plated steel	Fixing	Anchored with screws
-----------------	-------------------	---------------	----------------------

Finish	Coated finish. Category of atmospheric corrosivity C5 according to UNE EN ISO 12944-2.		
---------------	--	--	--


Colours




A. Cor-ten effect steel




B. Textured Silver steel




C. Traffic Yellow RAL 1023 steel



D. Light Green RAL 6027 steel



E. Reseda Green RAL 6011 steel



F. RAL optional (on demand)


1.2 Installation system

Hoisting

(P= 45 kg / 50 kg / 102 kg / 136 kg)


Installation

Tightly screw 4 stud bolts Din 913 M8 x 70 mm. Drill pavement (Ø12x100 mm) and fill with resin or fat mortar. Center and caulk the bench foot all around.

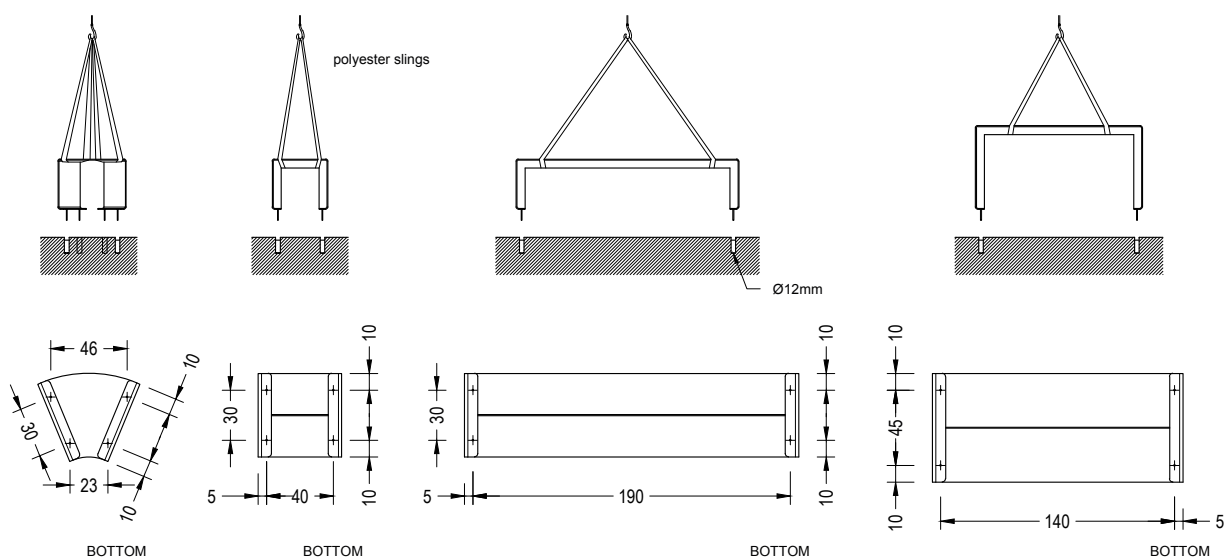


1.3 Geometry


Backless bench

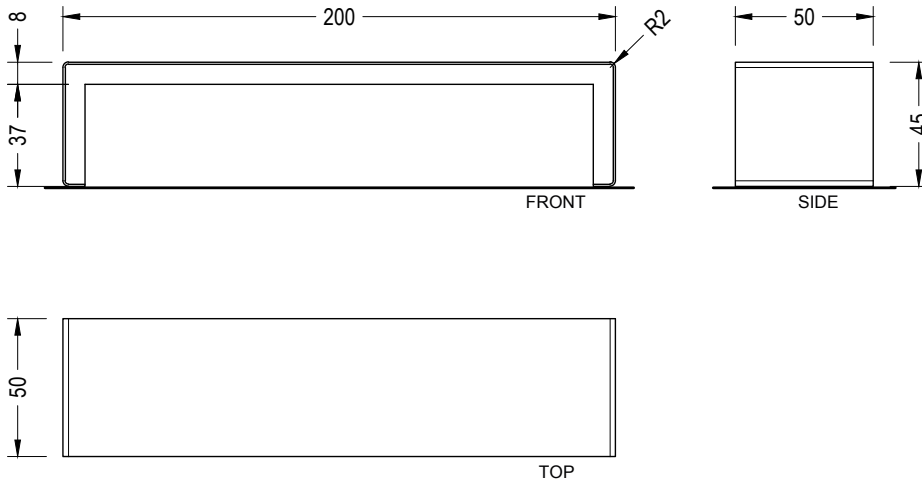


Backrest accessory

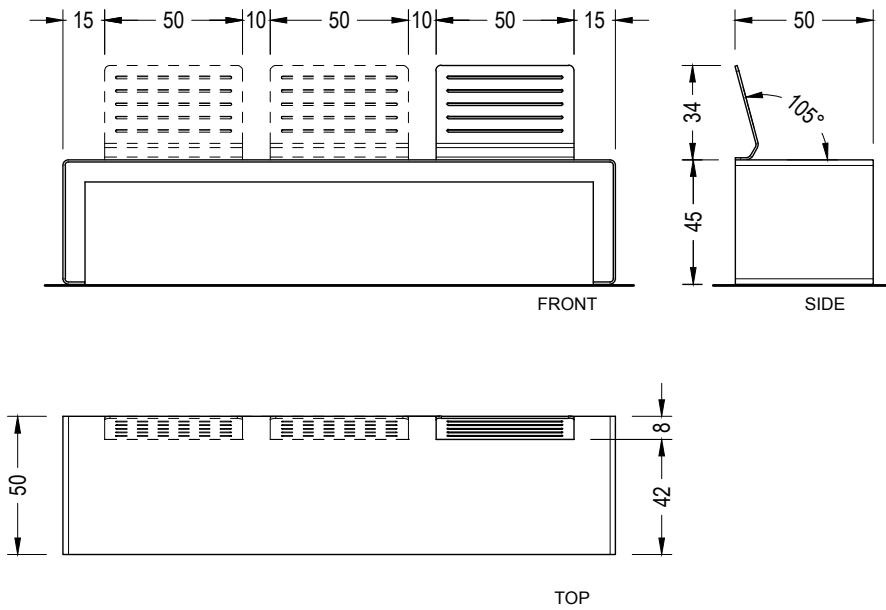

Stool




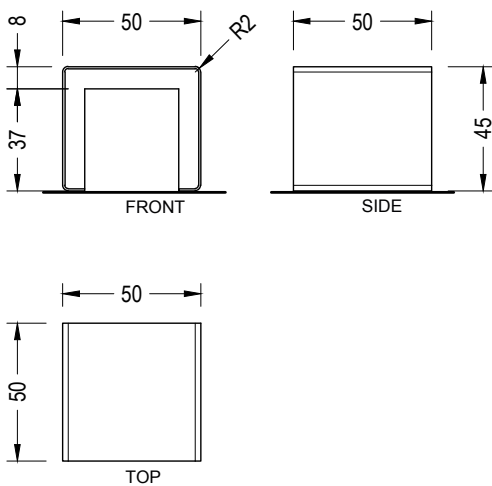


Connector



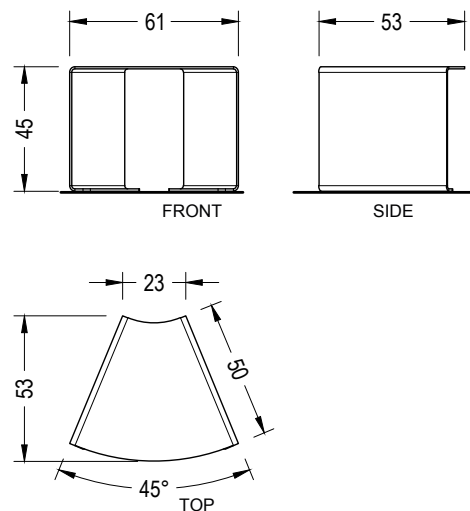



1.3 Geometry

Table

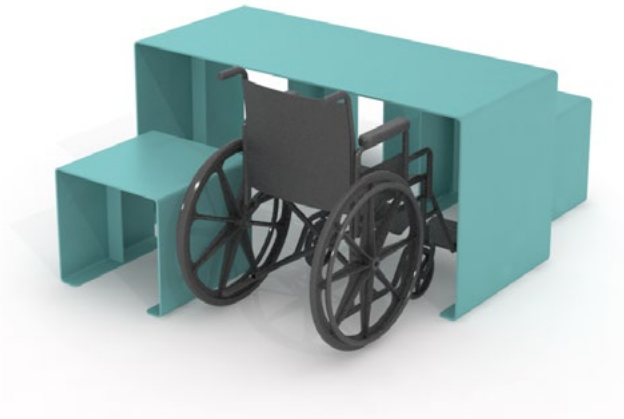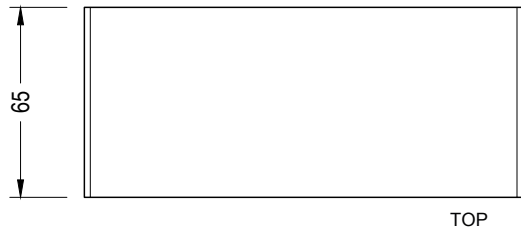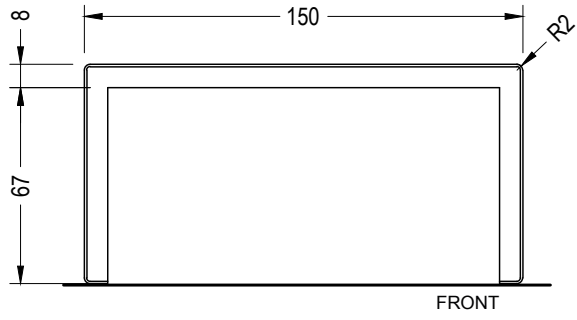

Aggregations

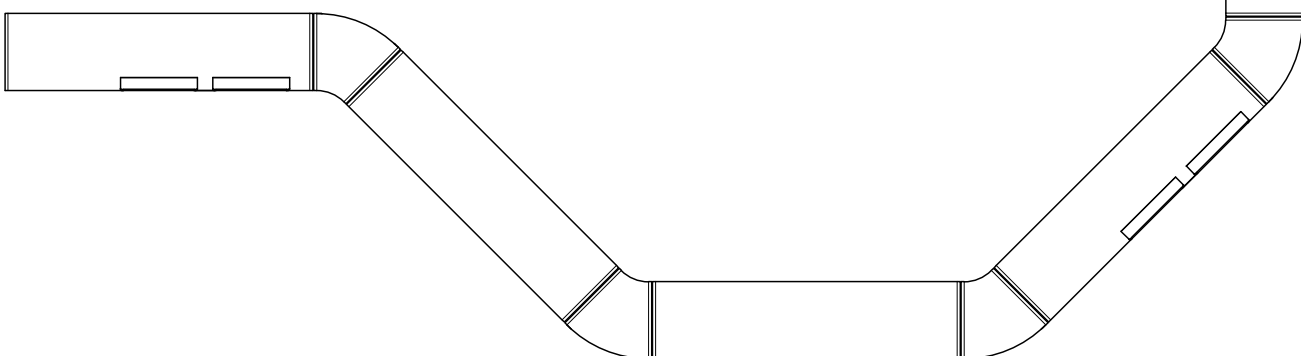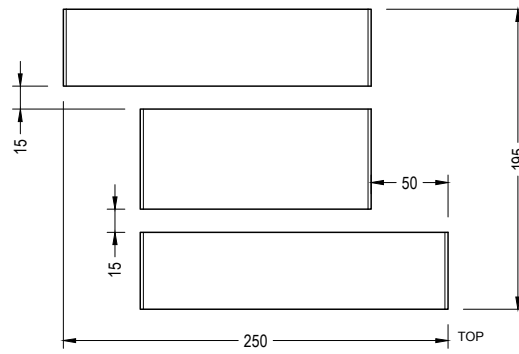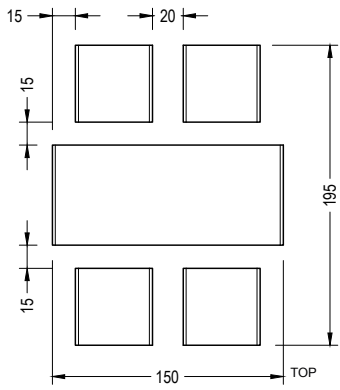

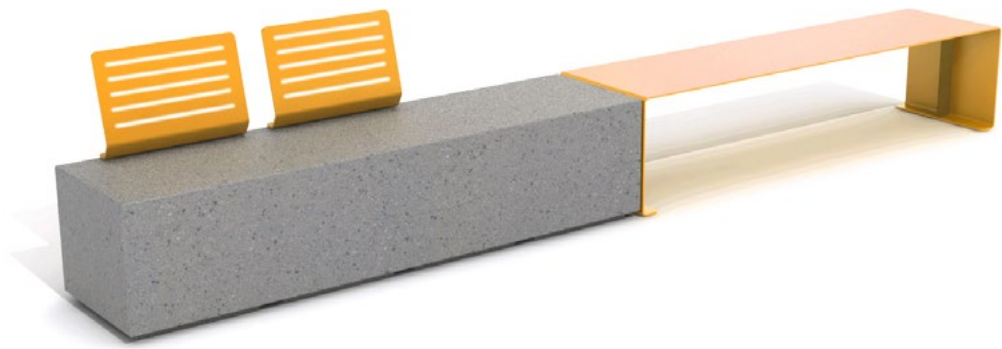

2. Planters

Band Planter	Rectangular	Square	Circular
Dimensions	200 x 50 x 45 cm	100 x 100 x 45 cm	Ø 80 x 64 cm
Weight	192 kg	175 kg	120 kg
Capacity	380 L	380 L	280 kg


1.1 General features

Material	Zinc plated steel	Fixing	Anchored with screws / Free-standing with adjustable legs
Finish	Coated finish. Category of atmospheric corrosivity C5 according to UNE EN ISO 12944-2.		


Colores




A. Cor-ten effect steel




B. Textured Silver steel




C. Traffic Yellow RAL 1023 steel



D. Light Green RAL 6027 steel



E. Reseda Green RAL 6011 steel



F. RAL optional (on demand)


1.2 Installation system

Hoisting


(P= 175 kg / 192 kg / 120 kg)

Installation


Tightly screw 4 stud bolts Din 913 M8 x 70 mm. Drill pavement (Ø12x100 mm) and fill with resin or fat mortar. Center and caulk the bench foot all around.



Anchored option




Adjustable legs option

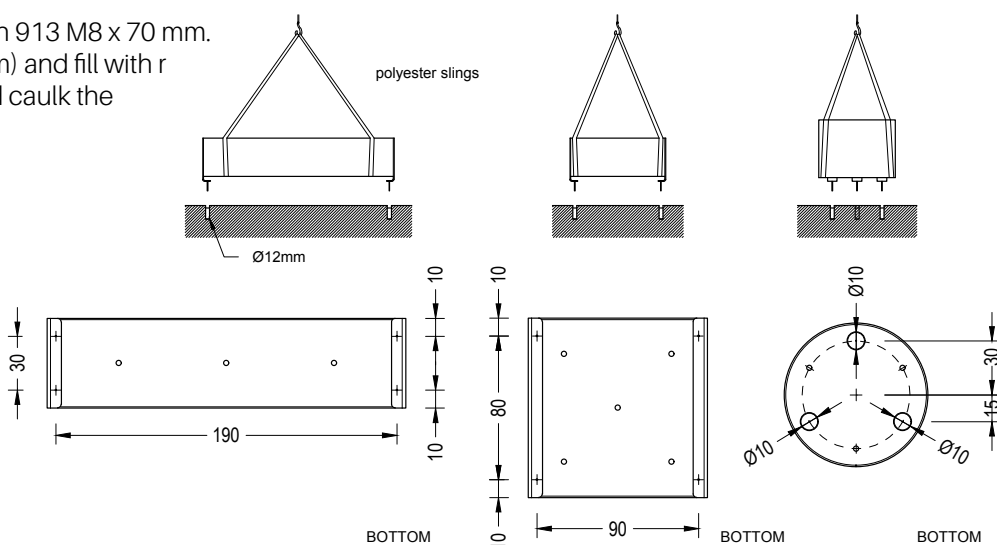


1.3 Geometry


Square

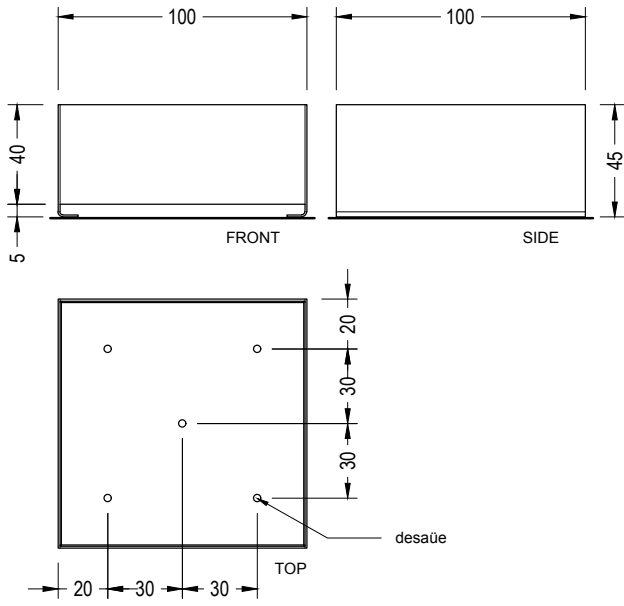

Circular

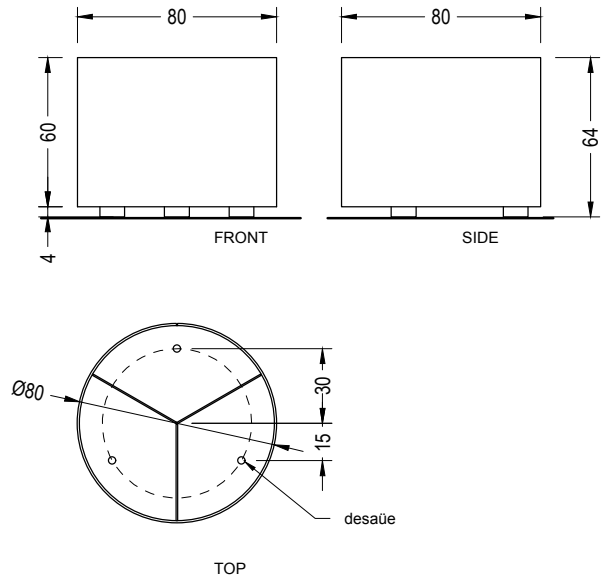

Rectangular

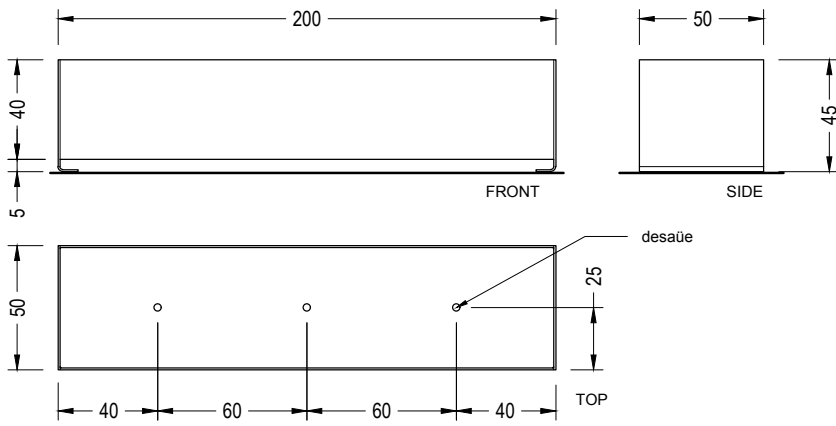

3. Bollard

Bollard

Dimensions 14 x 10 x 100 (125) cm

Weight 17 kg

1.1 General features


Material Zinc plated steel **Fixing** Embedded on pavement

Finish Coated finish. Category of atmospheric corrosivity C5 according to UNE EN ISO 12944-2.


Colores




A. Cor-ten effect steel




B. Textured Silver steel




C. Traffic Yellow RAL 1023 steel



D. Light Green RAL 6027 steel



E. Reseda Green RAL 6011 steel




F. RAL optional (on demand)

1.2 Installation system

Hoisting
(P=17 kg)


Installation

Drill pavement $\varnothing 10 \times 27$ cm and fill with resin or fat mortar. Center and caulk the bench foot all around.

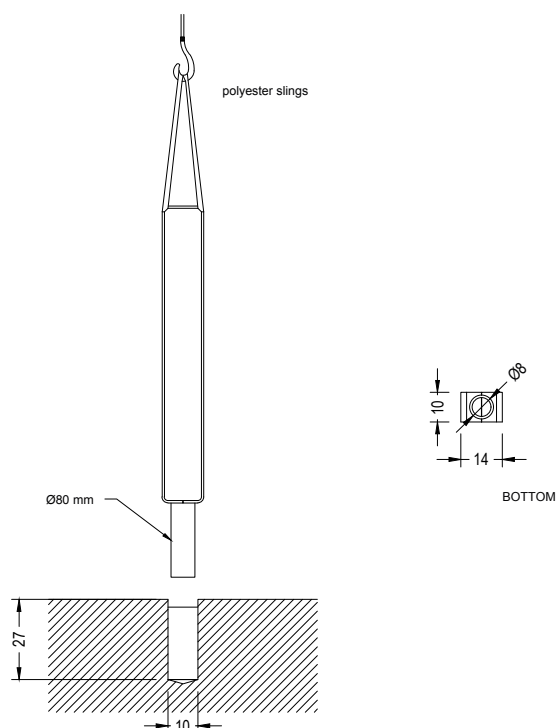


1.3 Geometry


Boundary

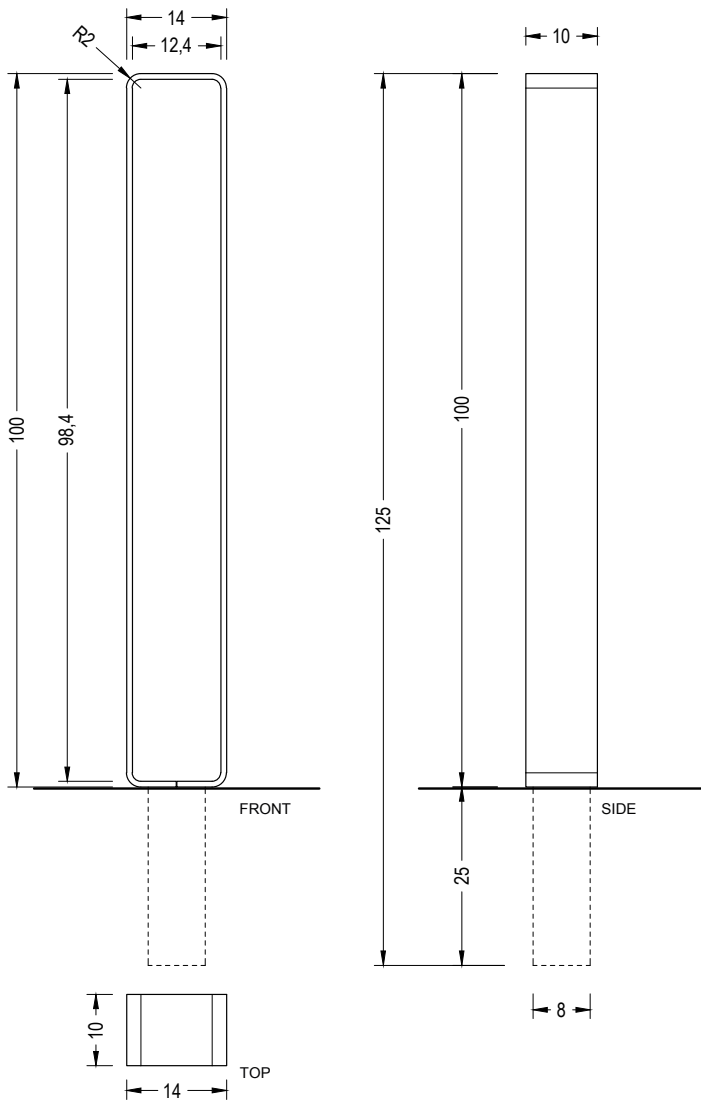

Bike rack

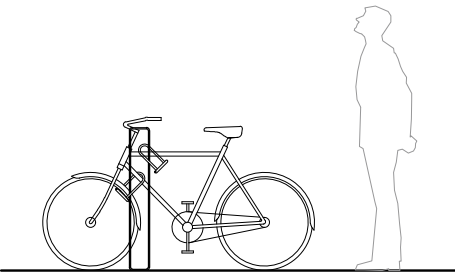

Boundary

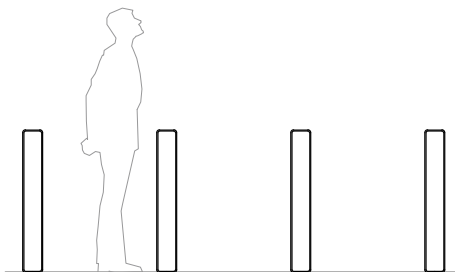




The names, trademarks and industrial models of the products have been logged in the corresponding registers. The technical information provided by Escofet about its products can be modified without prior notice.

Escofet 1886 S.A
Head office and production

Montserrat, 162
E 08760 Martorell
Barcelona - España
T. 0034 937 737 150
F. 0034 937 737 151

info@escofet.com
www.escofet.com



GA-2005/0072 SST-0090/2010 ER-0403/2016