

NIU is an urban element with the apparent formal simplicity of a concrete ring that in actual fact conceals its considerable functional versatility as a flower box, seat, tree guard and a sandbox for children. It has a slightly inclined layout and when installed in groups, it creates a set of variable reflections in the sunlight.

Concrete | Ø 237 cm | ⚖ 2040 kg/máx. | 🗑 315 L | ♿ 12

🔄 Update 10.07.2024



NIU

Nahtrang Disseny 2009

Escofet  
by Molins<sup>o</sup>

**ORIGIN**

Niu was originally designed to provide tiny oases in which to relax in barren areas, and read in the shade of a tree without the need to execute complex civil engineering work.

**VERSATILE**

Niu is supplied in the form of a closed circular ring with a diameter of 230 cm and also in the form of two halves, that surround an existing tree. The larger Niu Oval model is also supplied in two oval halves to facilitate transportation and handling.

**DYNAMIC**

They take on the appearance of large lily pads that spontaneously form nuclei and dispersions in space. The changes in inclination of the upper plane add an extremely suggestive compositional dynamism with the changing reflection of the sunlight.

Above all, Niu is an element that reconciles urban space, seeking to relate to users and inviting them to interact with it.

**MATERIAL**

The Niu flower box is made of reinforced concrete with an etched water-repellent finish and is supplied in the Escofet standard chart colours.

**INSTALLATION**

Self-standing, with no need for anchors.






# 1. Planter

	Niu	Niu Oval
<b>Dimensions</b>	Ø237 x 40 cm	426 x 325 x 40 cm
<b>Weight</b>	2040 kg	1700 kg/ud.
<b>1.1 General features</b>		
<b>Material</b>	Reinforced concrete	<b>Colocación</b> Free-standing Anchored with screws
<b>Finish</b>	Etched and waterproofed	


## Colours




**GR.** Grey




**BL.** White



**CA.** CA  
Grey



**RA.** Red



**BG.** Beige

## 1.2 Installation system

### Hoisting




(P=1020 / 1700 / 2040 kg)

### Installation


A- Free-standing

Anchored with screws


B- Tightly screw M16 x 140 stud bolts, drill the pavement and fill with resin and place the planter in it's correct position.

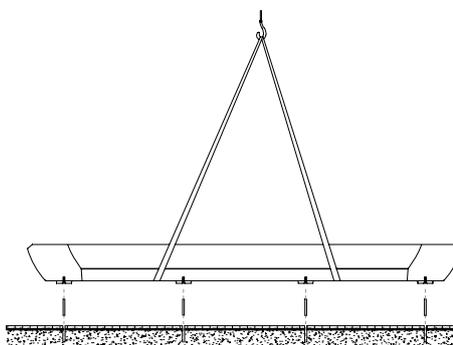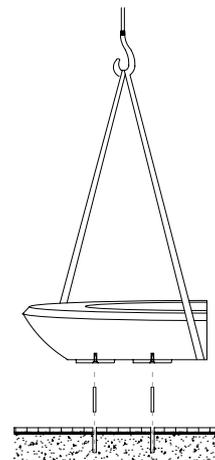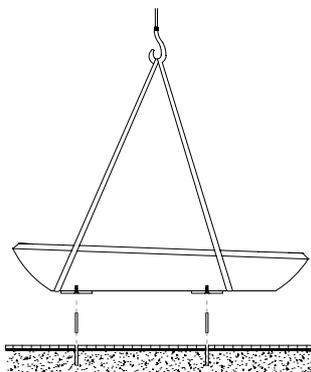

Niu

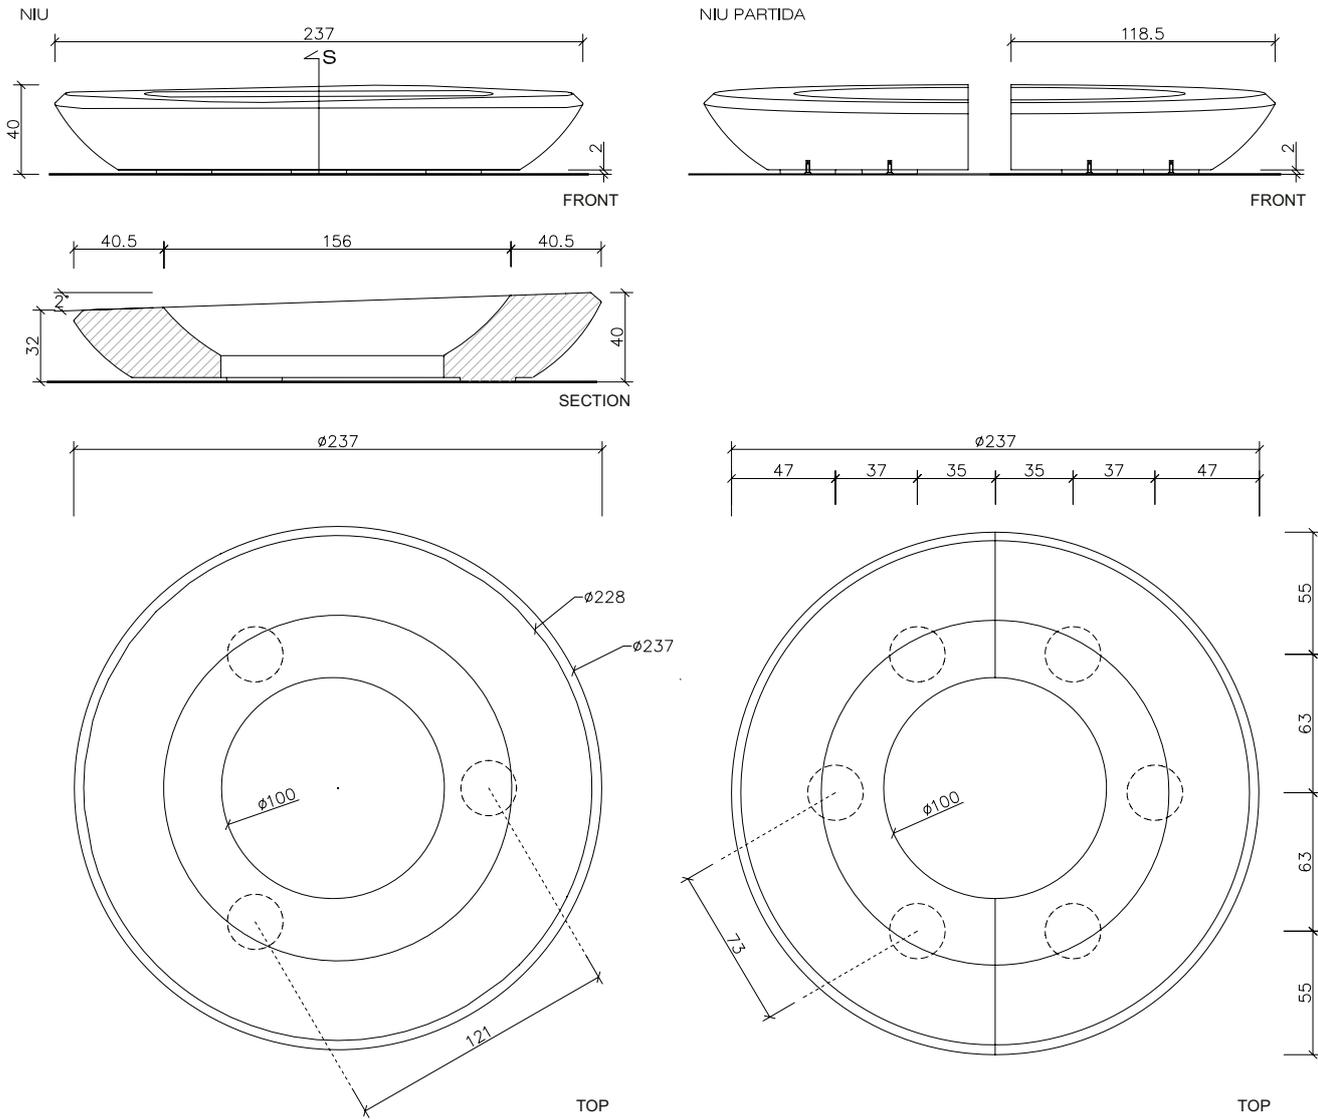


Agregations

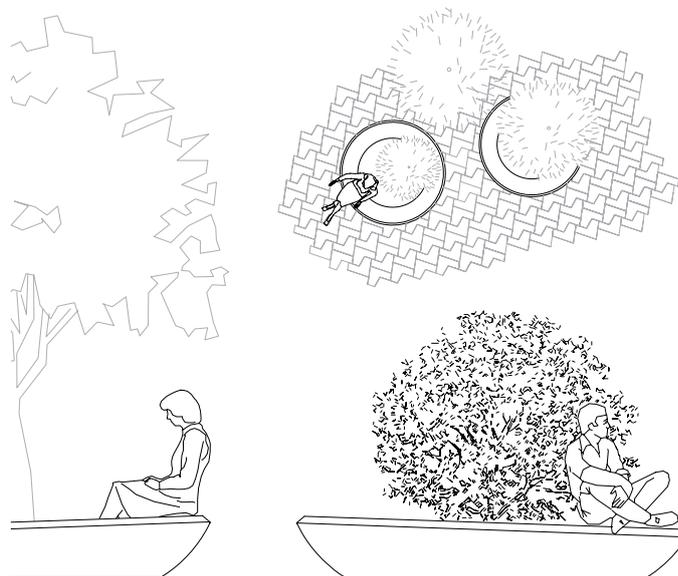


## 1.3 Geometry

### Niu oval

Two units for Ellipse

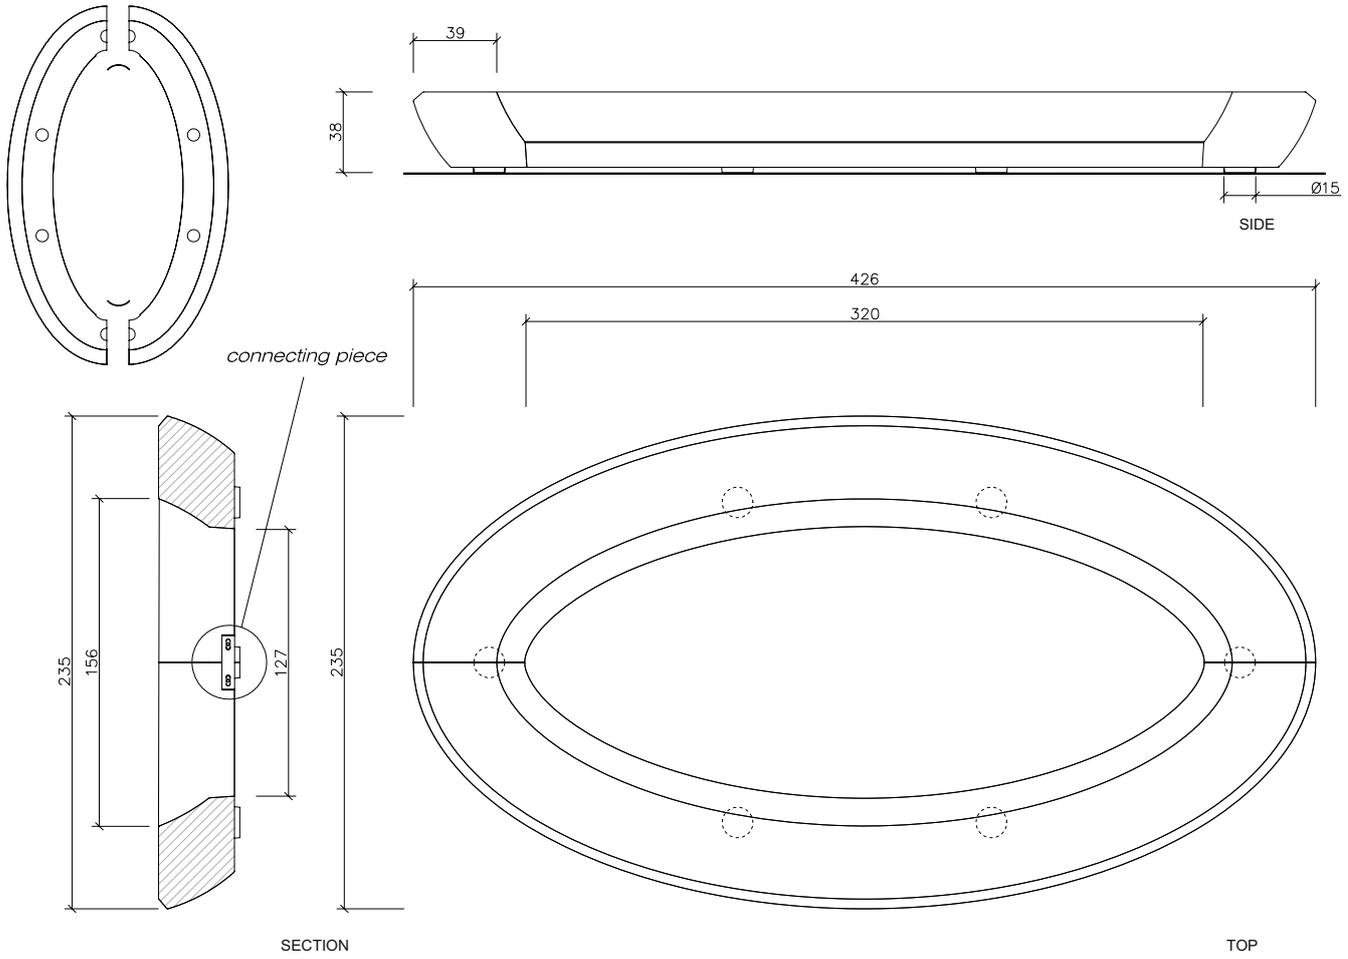

### Agregations

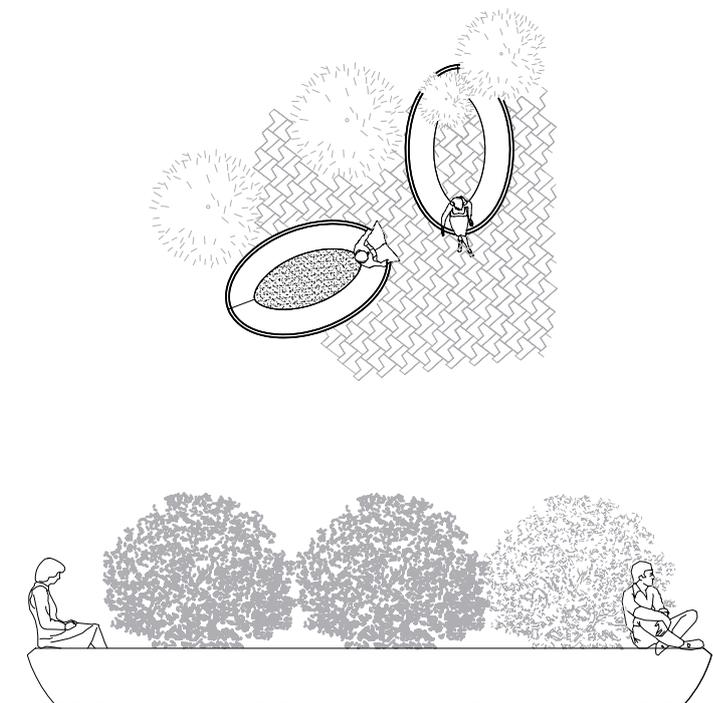

NIU



**Escofet**  
by Molins<sup>®</sup>



NIU



**Escofet**  
by Molins<sup>®</sup>



### Warranty

5 years in concrete elements.


The names, trade marks and industrial models of the products have been deposited in the corresponding registries. The technical information provided by Escofet about its products may be modified without prior notice.

Escofet 1886 S.A  
Central office and production

Montserrat, 162  
E 08760 Martorell  
Barcelona - España  
T. 0034 937 737 150  
F. 0034 937 737 151

info@escofet.com  
www.escofet.com

**Escofet**  
by Molins<sup>®</sup>



GA-2005/0072



SST-0090/2010



ER-0403/2016

